

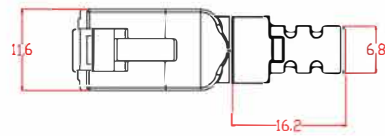
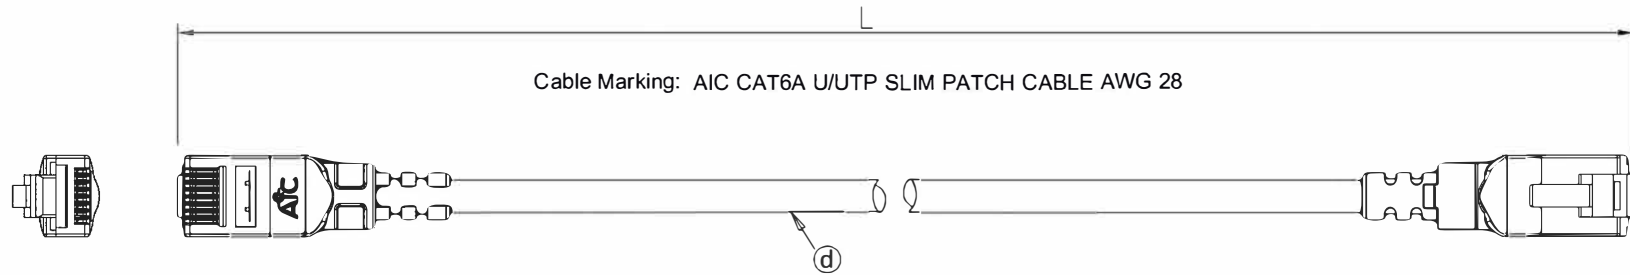


Article number	Length (mm)	Material No.	Packing	Build SOP	NO.	ELECTRICAL TEST	NO.	NAME	Material No.	UNIT
AIC-FCAT6-MM-003	300±20	028-758		under building	1	100% OPEN SHORT MIS WIRE TEST	Ⓐ	Connector	RJ45 8P8C M PIN:Gold plated	2pcs
AIC-FCAT6-MM-006	600±20				2	CONTACT RESISTANCE:5 OHM MAX	Ⓑ	Outer mold	PVC Black 45P	g
AIC-FCAT6-MM-010	1000±30				3	INSULATION RESISTANCE:5M OHM MIN	Ⓒ	Clip	ABS Black	2pcs
AIC-FCAT6-MM-020	2000±30				4	HI-POT TEST:DC 300V/10ms	Ⓓ	Cable	CAT6A U/UTP 28AWG(7/0.12BC)*4C BLACK TPE Jacket OD:3.6±0.15mm	m
AIC-FCAT6-MM-030	3000±30				5	PASS CAT6A standard				



White silk screen Size:



PINOUT

P1(T568B)	WIRE	P2(T568B)
1	WHT/ORG	1
2	ORG	2
3	WHT/GRN	3
6	GRN	6
4	BLU	4
5	WHT/BLU	5
7	WHT/BRN	7
8	BRN	8

